





The Combi-MR is Combilift's multidirectional stand-on reach truck which offers superb manoeuvrability and safety in the tightest working conditions.

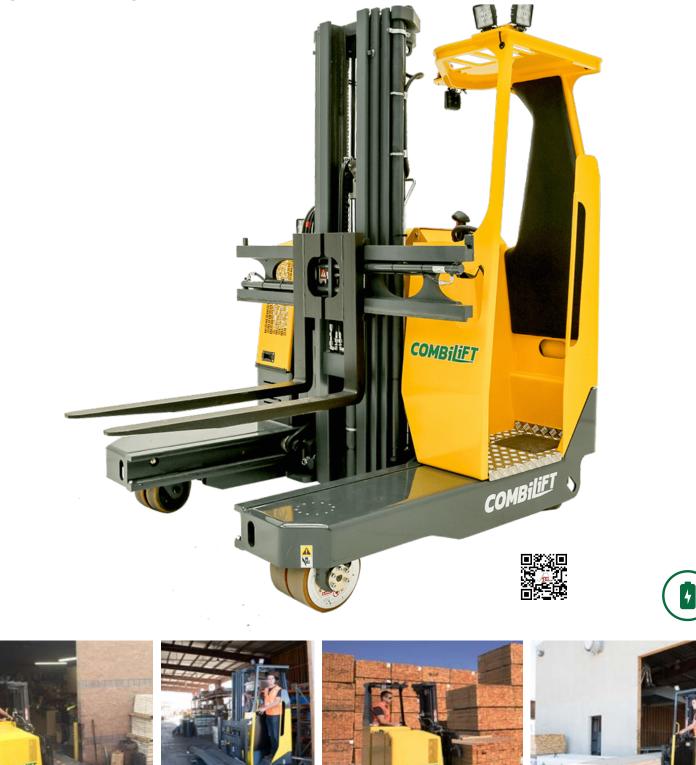

TotalTruck@TotalTruck.dk / www.lagereksperten.dk

combilift.com

## COMBi-MR

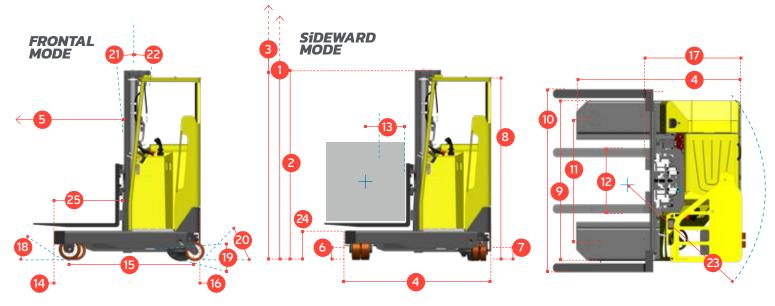

This compact truck features one rear wheel drive with a large rubber tyre and 360° steering rotation. The multi-functional controlled joystick allows the operator to change direction and travel speed in a smooth seamless motion, in addition to full control of all the hydraulic functions. This contributes to faster procedures for manufacturing distribution and logistics operations.

REF.	DESCRIPTION	STANDARD	OPTIONAL	
1a	Standard Lift Height	4040 mm	5540 mm	
1b	Freelift Height	0 mm	1480 mm	
2	Height Mast Closed	2670 mm	2490 mm	
3	Max. (Mast raised)	4750 mm	6530 mm	
4	Overall Length	1905r	nm	
5	Mast Travel	865 r	865 mm	
6	Ground Clearance Under Mast	100 m	100 mm	
7	Ground Clearance to Wheelbase	100 n	100 mm	
8	Height Over Cab (without work lights)	2490	2490 mm	
9	Overall Width	1850 r	1850 mm	
10	Width over forks	2105 r	2105 mm	
11	Track Front	1450 r	1450 mm	
12	Frame Opening	940 n	940 mm	
13	Load Centre Distance	610 m	610 mm	
14	Overhang Front	200 n	200 mm	
15	Wheelbase	1475 mm	1625 mm	
16	Overhang Back	230 n	230 mm	
17	Length From Face of Fork		1090 mm	
18	Approach Angle	35	35°	
19	Ramp Angle	15°	15°	
20	Departure Angle		35°	
21	Forward Tilt		2°	
22	Backward Tilt	4°	4°	
23	Minimum Outside Radius	1955 r	1955 mm	
24	Platform Height	390 n	390 mm	
25	Platform Length	790 n	790 mm	
А	Capacity	2500	2500 kg	
В	Unladen Weight	5000	5000 kg	
С	Maximum Ground Speed		7 km/h	
D	Gradibility		7%	
E	AC Rear Drive	6 kV	6 kW	
F	Battery		48V x 775Ah	
G	Fork Section	50 mm x 100 m	50 mm x 100 mm x 1150 mm	
Н	Vulkollan Front Tyre		OD 250 mm / Width 75 mm	
- I	Solid Rubber Rear Tyre		OD 400 mm / Width 180 mm	
J	Standard Colour	Yellow &	Yellow & Grey	
			rev. 1.	

## **Multi-Directional**



## **Features Include:**

- Standing Operator Over-Head Guard
- Multi-Direction Operation
- AC Electric Steering
- AC Motor Technology
- Multi-Function Joystick
- Optional Integrated Hydraulic Fork
  Positioner



TotalTruck A/S CVR-nr. DK 26 12 66 22

Lucernetoften 5 · 5550 Langeskov Tlf. +45 70 27 99 88

## TotalTruck@TotalTruck.dk / www.lagereksperten.dk

combilift.com