


# WPi015

Lithium-Ion Low Lift Pallet Truck  
1.500 kg

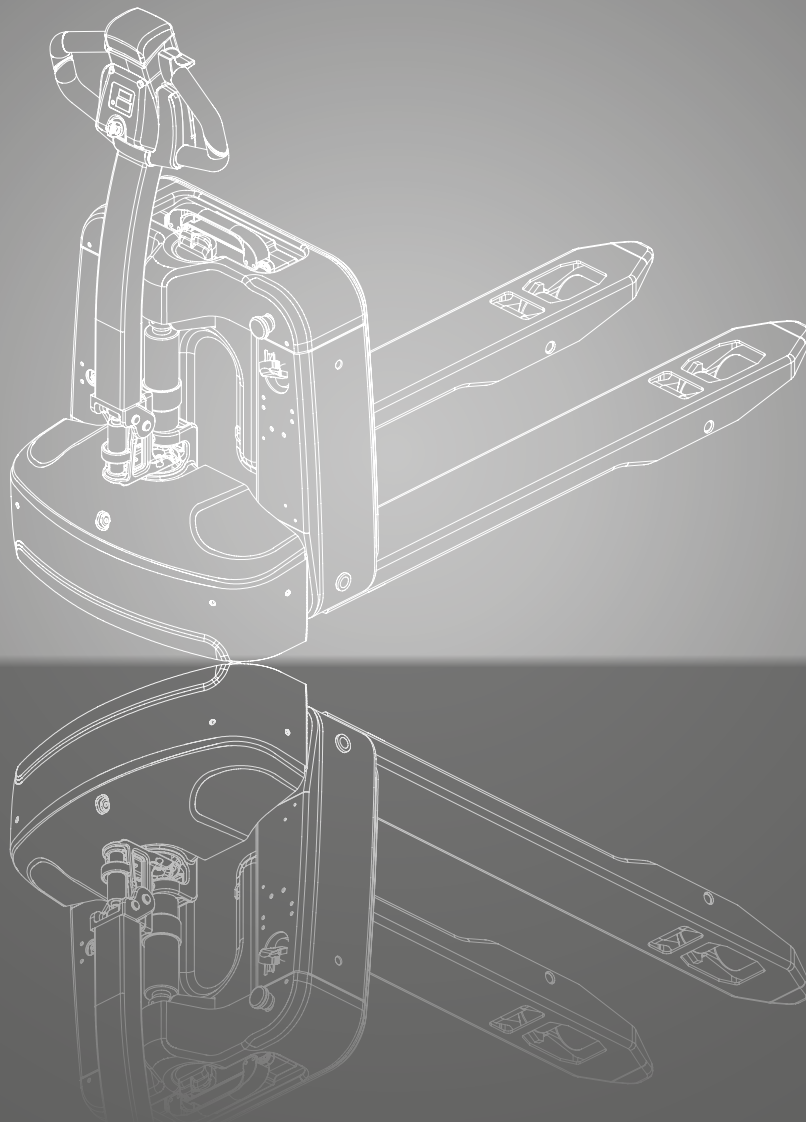



# DIMENSIONS

## WPio15

$$R_h = \sqrt{x^2 + \left(\frac{b_{12}}{2}\right)^2}$$

$$A_{st} = W_a + l_6 - x + a \text{ if } R_h < W_a$$

$$A_{st} = R_h + l_6 - x + a \text{ if } R_h > W_a$$

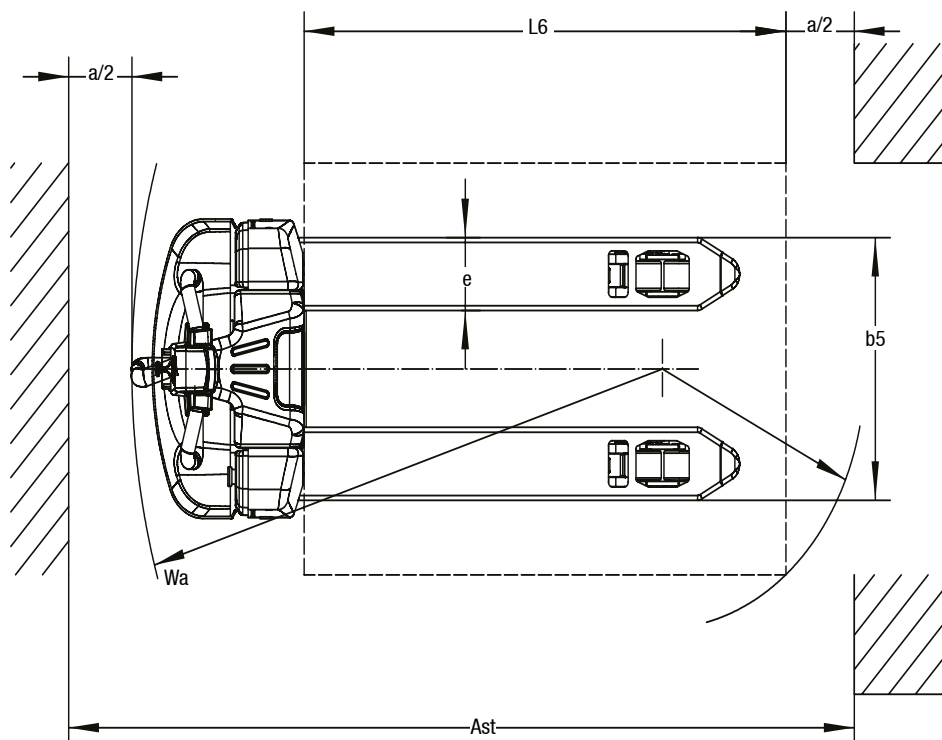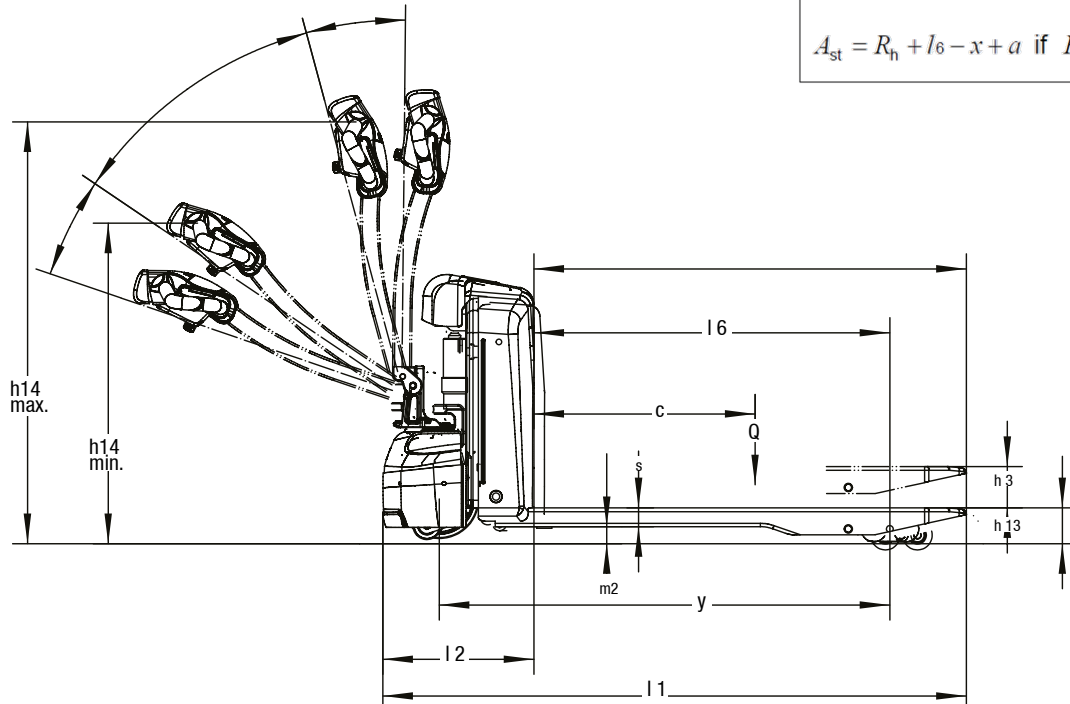

For corresponding data see specification chart.

# SPECIFICATIONS

## Product Specification acc. to VDI 2198

1.1 Manufacturer (Abbreviation)		CLARK
Specifications	1.2 Manufacturer's designation	<b>WPio15</b>
	1.3 Drive	24 V Electric
	1.4 Operator type	Pedestrian
	1.5 Rated capacity/rated load	Q (kg) 1.500
	1.6 Load centre distance	c (mm) 600
	1.8 Load distance	x (mm) 940
	1.9 Wheelbase	y (mm) 1.200
Weight	2.1 Service weight incl. battery (see 6.5)	kg 160
	2.2 Axle loading, laden front/rear	kg 510 / 1.140
	2.3 Axle loading, unladen front/rear	kg 130 / 30
Tyres, Chassis	3.1 Tyres	Polyurethane
	3.2 Tyre size, front	Ø 210 x 70
	3.3 Tyre size, rear	Ø 80 x 60 / Ø 74 x 88
	3.4 Additional wheels (dimensions)	Ø 74 x 30
	3.5 Wheels, number front/rear (x = driven wheels)	1 x + 2 / 4 / 1 x + 2 / 2
	3.6 Tread, front	b10 (mm) 450
	3.7 Tread, rear	b11 (mm) 390
Dimensions	4.4 Lift	h3 (mm) 115
	4.4 Lift height	h3 + h13 (mm) 195
	4.9 Height tiller in driving position min./max.	h14 (mm) 700 / 1.260
	4.15 Height, lowered	h13 (mm) 80
	4.19 Overall length (without platform)	l1 (mm) 1.550
	4.20 Length to face of forks (without platform)	l2 (mm) 400
	4.21 Overall width	b1 (mm) 610
	4.22 Fork dimensions	s • e • l (mm) 50 x 150 x 1.150
	4.25 Distance between fork-arms	b5 (mm) 540
	4.32 Ground clearance, centre of wheelbase	m2 (mm) 30
Performance	5.1 Travel speed, laden/unladen	km/h 4,5 / 5
	5.2 Lift speed, laden/unladen	m/s 0,028 / 0,031
	5.3 Lowering speed, laden/unladen	m/s 0,068 / 0,043
	5.8 Max. gradeability, laden/unladen *1	% 6 / 16
	5.10 Service brake	Electric
Electrics	6.1 Drive motor rating S2 60 min	kW 0,75
	6.2 Lift motor rating at S3 15 %	kW 0,8
	6.3 Battery acc. to DIN 43531/35/36 A, B, C, no	No
	6.4 Battery voltage/nominal capacity (5hr)	V/Ah 24 / 30
	6.5 Battery weight	kg 10
	6.6 Energy consumption acc. to VDI cycle	kWh/h -
	- Battery type	Lithium-ion
8.1 Type of drive unit	DC	
Misc.	10.5 Steering design	Mechanical
	10.7 Sound pressure level at the driver's seat acc. to EN 12053	dB(A) 74

\*1) At friction coefficient  $\mu=0.6$  with 1.6 km/h

All data refer to trucks in standard design.

Performance may vary + 5 % and - 10 % due to motor and system efficiency tolerance. The performance shown represents nominal values which may be obtained under typical operating conditions of a machine. CLARK products and specifications are subject to change without notice.

# EQUIPMENT EXTRAS

		<b>WPio15</b>
<b>General</b>	Easy to handle lithium-ion battery (10 kg)	•
	Truck net weight, including battery 160 kg (incl. battery)	•
	Internal charger (24 V / 10 A)	•
	External charger (24 V / 10 A)	x
	Electrical lift and lowering and electrical drive system	•
<b>Drive Options</b>	Tandem load wheel (Polyurethane)	•
	Single load wheel (Polyurethane)	x
	Replacement lithium-ion battery	x
	Battery discharge indicator	•
<b>Dimensions</b>	Distance between fork-arms: 540 mm	•
	Distance between fork-arms: 685 mm	x
	Fork length 1.150 mm	•
	Fork length 900 mm, 1.000 mm, 1.220 mm, 1.350 mm or 1.500 mm	x
<b>Safety</b>	Key switch activation via smart key	•
	Monitored by battery management system	•
	Automatic lift stop at maximum lift	•
	Gradient anti-roll-back	•
	Automatic parking brake	•
	Belly switch	•

• = Standard Equipment; x = Option

# FEATURES & ADVANTAGES

## WPio15

### Electrical lifting and lowering

- Sensitive lifting and lowering
- Drive and operating controls in easy reach position
- Automatic braking when the tiller arm is released
- Suitable for both left- and right-handed users

### Smart Key


- Smart-Key activation
- Easy to use
- Access control

### Smart Display

- Battery discharge indicator
- Operating hour counter
- Battery management system
- On-board diagnostics via error codes

### Application

- Powerful 24 Volt drive with Li-ion-Power
- Smooth and quiet operation
- Always usable with the lithium-ion battery from top-up charging
- Quick charging times
- Programmability for adapted driving behavior
- Maneuverability in tight corners
  - Total width (b1) only 610 mm
  - Length to fork face (l2) only 400 mm
  - Turning radius (WA) only 1.330 mm

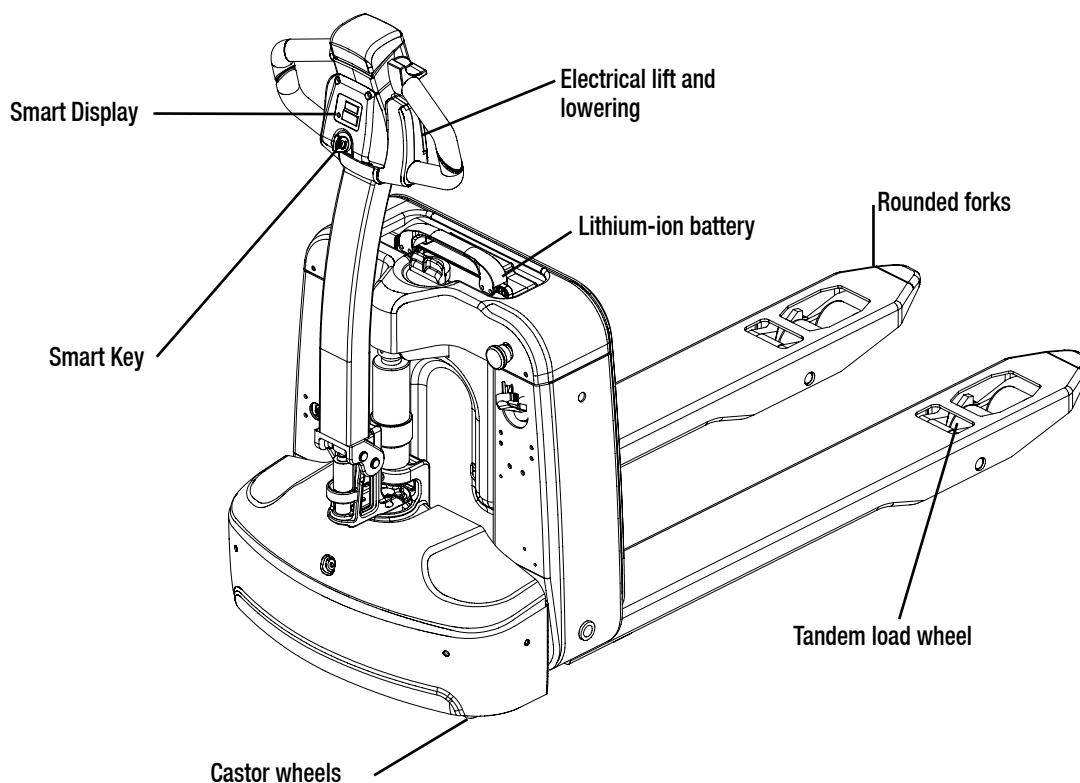

## WPio15

### The WPio15 – The compact power pack

The WPio15 is a lithium-ion powered low lift pallet truck with capacity up to 1.500 kg. It is ideal for transporting all kinds of goods over short distances. The minimal L2 dimension (length to face of forks) of only 400 mm, makes the WPio15 extremely compact and ideal for use in confined spaces, e.g. in stores and business centres of all types. A further advantage is the low service weight of only 160 kg.

Thanks to the maintenance-free lithium-ion battery and the included charger daily routines stay much the same when a conventional low lift pallet truck is replaced with the WPio15. The WPio15 is perfect for medium intensive application in goods distribution, production tasks or warehouse applications.

### Advantages of Lithium-ion technology in the WPio15

#### High performance in a compact design

The high energy density of the installed lithium-ion battery provides great travel performance and long operating periods of up to 3,2 hours. At the same time, the WPio15 is very compact and has a low service weight, which means it consumes up to 30 % less energy than vehicles with lead-acid batteries.

#### Fast charging + top-up charging

Up to 5 % of battery capacity can be recharged in just 10 minutes. Top-up charging can be used between full charges without affecting the service life of the battery. The battery can be recharged with any 230-V socket. A completely discharged battery (20 %) is fully charged in about 3,5 hours.

#### Double service life + maintenance-free battery

The Lithium-ion battery has approximately twice the service life of a conventional lead-acid battery. In addition, no maintenance work is required, such as checking the water level around the Lithium-ion battery. No costs are incurred for adapting the existing charging infrastructure (e.g. ventilation).

CLARK Europe GmbH  
Dr.-Alfred-Herrhausen-Allee 33  
47228 Duisburg / Germany  
Tel.: +49 (0)2065 499 13-0  
Fax: +49 (0)2065 499 13-290  
E-Mail: [Info-europe@clarkmheu.com](mailto:Info-europe@clarkmheu.com)  
[www.clarkmheu.com](http://www.clarkmheu.com)

Dealer:



TotalTruck A/S

CVR-nr. DK 26 12 66 22

Lucernetoften 5 · 5550 Langeskov

Tlf. +45 70 27 99 88